




Water Heaters

Made in Italy

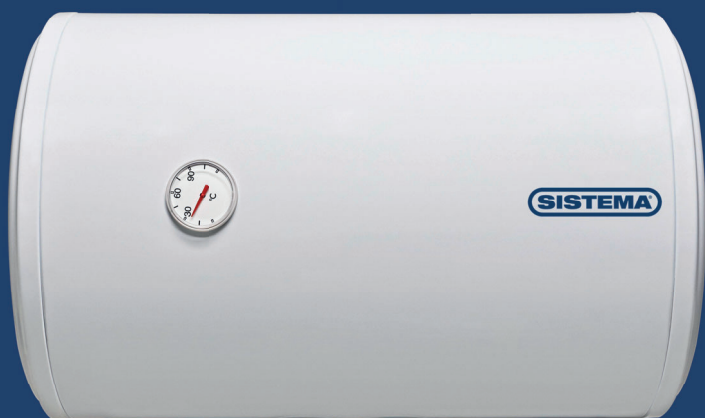

Catalogue
2025



SSQ

*ELECTRIC WATER HEATERS
SMALL CAPACITIES*

Pag.2



SSB

*ELECTRIC WATER HEATERS
SMALL CAPACITIES*

Pag.4



SSV

*ELECTRIC WATER HEATERS
VERTICAL STANDARD SERIES*

Pag.6



SSO

*ELECTRIC WATER HEATERS
HORIZONTAL STANDARD SERIES*

Pag.8

ELECTRIC WATER HEATERS SMALL CAPACITIES

Electric storage water heater, small capacity. Available both over-sink and under-sink version. Available also with external regulation of temperature.

- Perfect to heat water for kitchen or sink use
- High versatility of installation, even into not-on-sight furniture
- Small dimensions require short period to heat water
- New design meets perfectly the new requirements of energy saving



TECHNICAL DATA

	SSQ 12	SSQ 15
Thermal Dispersiom 50° (KWh/24h)	0.38	0.42
Power (W)	1500	1500
Voltage (V)	230	230
Heating time (Δt 50°)	28'	35'
Max working temperature (C°)	65°	65°
Max working pressure (bar)	8	8
Protection against humidity	IPX4	IPX4
Insulation class	I	I
Profile	XXS	XXS
Energy Class	C	C

ELECTRIC WATER HEATERS SMALL CAPACITIES

HIGH ENERGY EFFICIENCY

**EXTERNAL REGULATION
OF TEMPERATURE**

**ABSENCE OF CFC;
POLYURETHANE FOAM
FOR ECOLOGICAL THERMAL
INSULATION**

**COPPER
HEATING ELEMENT**

THERMOSTAT


**LED
CONTROL**

**ROHS
COMPONENT**

**MAGNESIUM
ANODE**

**POLYURETHANE
FOAM CFC FREE**




**INSTALLATION
KIT**

**EXTERNAL REGULATION
OF TEMPERATURE**

ERP 2017

**SMOKE
CONTROL**

**ENVIRONMENT
RESPECT**

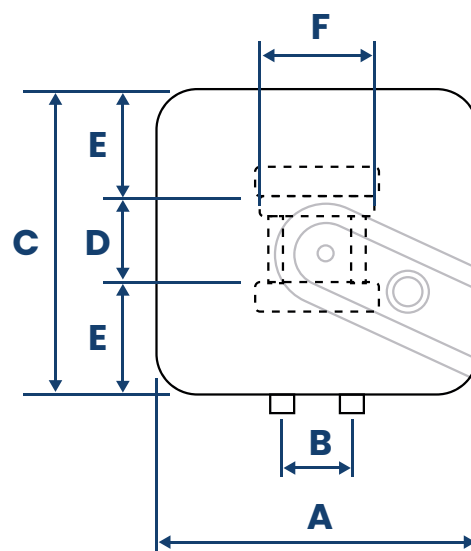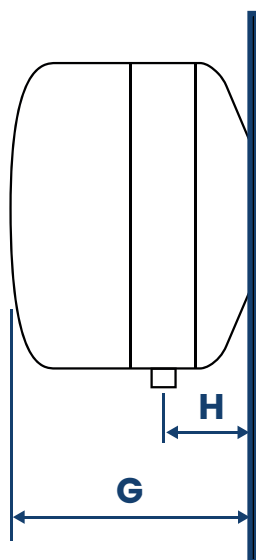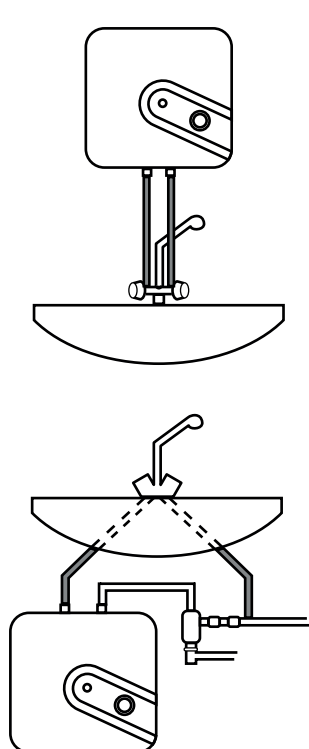DIMENSIONS



	A	B	C	D	E	F	G	H
SSQ12	360 mm	75 mm	360 mm	100 mm	130 mm	135 mm	255 mm	110 mm
SSQ15	360 mm	75 mm	360 mm	100 mm	130 mm	135 mm	290 mm	110 mm

ELECTRIC WATER HEATERS SMALL CAPACITIES

Electric storage water heater 30lt with external regulation of temperature.

- Perfect to heat water for kitchen or sink use
- High versatility of installation, even into not-on-sight furniture
- Small dimensions require short period to heat water



TECHNICAL DATA


SSB 30

Thermal Dispersiom 50° (KWh/24h)	0,7
Power (W)	1500
Voltage (V)	230
Heating time (Δt 50°)	70'
Max working temperature (C°)	65°
Max working pressure (bar)	8
Protection against humidity	IPX4
Insulation class	I
Profile	S
Energy Class	C

ELECTRIC WATER HEATERS SMALL CAPACITIES

+ INCREASED MAGNESIUM ANODE, FOR TOTAL PROTECTION AGAINST VACANT CURRENTS + GLASS ENAMELED TANK + ABSENCE OF CFC; POLYURETHANE FOAM FOR ECOLOGICAL THERMAL INSULATION + EXTERNAL REGULATION OF TEMPERATURE	 COPPER HEATING ELEMENT  THERMOSTAT  LED CONTROL  ROHS COMPONENT  MAGNESIUM ANODE  POLYURETHANE FOAM CFC FREE  INSTALLATION KIT  EXTERNAL REGULATION OF TEMPERATURE  ERP 2017  SMOKE CONTROL  ENVIRONMENT RESPECT
--	---

DIMENSIONS

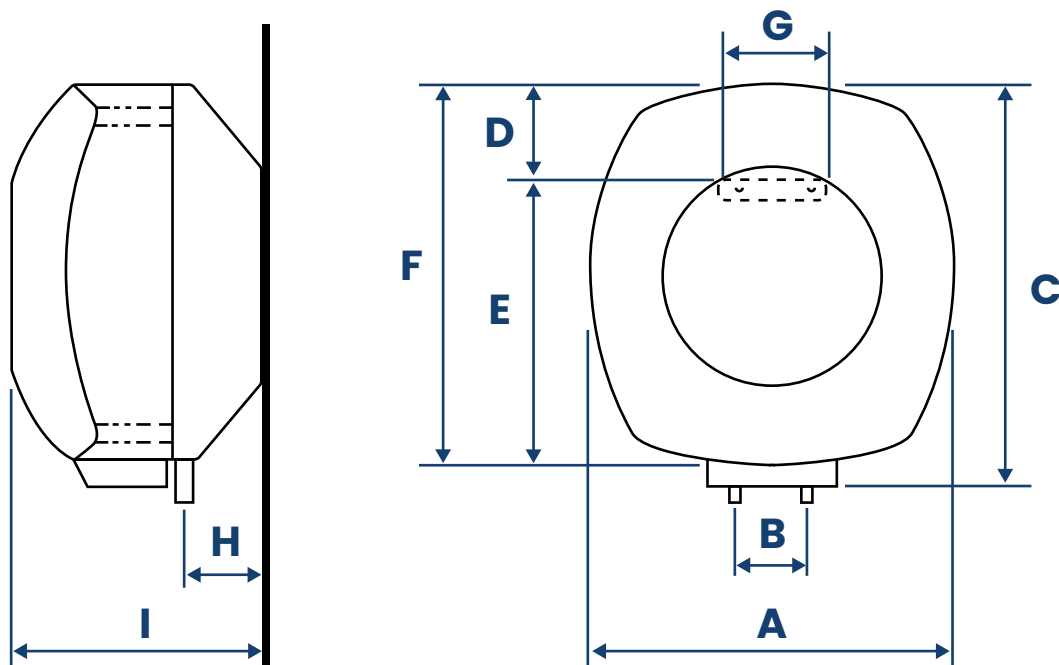

	A	B	C	D	E	F	G	H	I
SSB 30	475 mm	100 mm	530 mm	120 mm	365 mm	485 mm	140 mm	105 mm	325 mm

ELECTRIC WATER HEATERS VERTICAL STANDARD SERIES

Electric storage water heater, vertical wall installation.
Available also with manual external regulation.

- It is the classic model, which has been around for years in Italian homes to satisfy the most various hot water needs.
- It is an easy installation product, which allows you to have hot water ready for use: ideal for treating yourself to a nice one relaxing and regenerating hot shower!


TECHNICAL DATA

* the indicated power is the one suggested by the manufacturer for the best combination of performance / energy saving, other powers are also available on customer request

	SSV 50	SSV 80	SSV 100	SSV 120	SSV 150	SSV 200
Thermal Dispersiom 50° (KWh/24h)	0,98	1,32	1,51	1,84	2,09	2,41
Power (W)	1200	1200	1500	1500	2000	2000
Voltage (V)	230	230	230	230	230	230
Heating time (Δt 50°)	145'	232'	245'	280'	310'	372'
Max working temperature (C°)	65°	65°	65°	65°	65°	65°
Max working pressure (bar)	8	8	8	8	8	8
Protection against humidity	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Insulation class	I	I	I	I	I	I
Profile	M	M	M	L	XL	XL
Energy Class	C	C	C	C	C	C

ELECTRIC WATER HEATERS VERTICAL STANDARD SERIES

+ **INCREASED MAGNESIUM ANODE,**
FOR TOTAL PROTECTION AGAINST
VACANT CURRENTS

+ **GLASS ENAMELED**
TANK


+ **ABSENCE OF CFC;
POLYURETHANE FOAM**
FOR ECOLOGICAL THERMAL
INSULATION



**COPPER
HEATING ELEMENT**



**SMOKE
CONTROL**



**ERP
2017**



**MAGNESIUM
ANODE**



**LED
CONTROL**



**ROHS
COMPONENT**




**POLYURETHANE
FOAM CFC FREE**



THERMOSTAT

DIMENSIONS

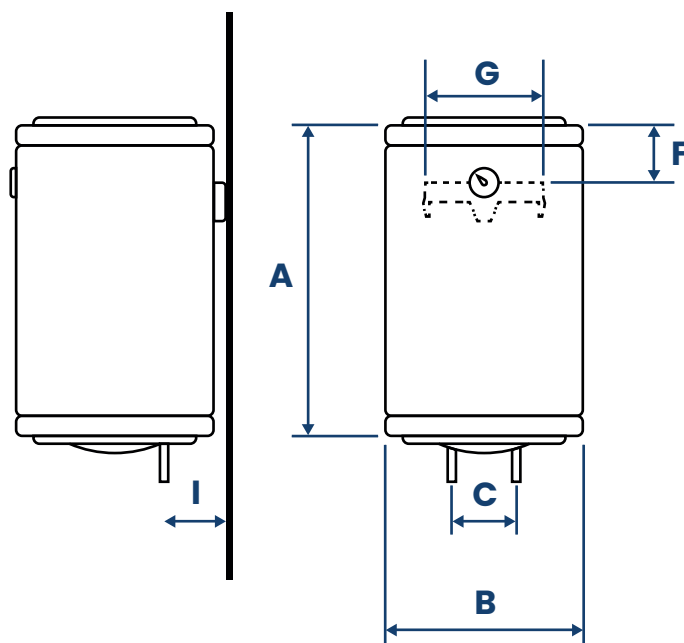

	A	B	C	F	G	I
SSV 50	510 mm	460 mm	100 mm	130 mm	350 mm	130 mm
SSV 80	700 mm	460 mm	100 mm	130 mm	350 mm	130 mm
SSV 100	805 mm	460 mm	100 mm	130 mm	350 mm	130 mm
SSV 120	1000 mm	460 mm	100 mm	130 mm	350 mm	130 mm
SSV 150	935 mm	550 mm	100 mm	180 mm	350 mm	130 mm
SSV 200	1105 mm	550 mm	100 mm	180 mm	350 mm	130 mm

ELECTRIC WATER HEATERS HORIZONTAL STANDARD SERIES

Electric storage water heater, horizontal wall installation.
Available with electrical connection on the right or left, on request.

- It is the classic model, which has been around for years in Italian homes to satisfy the most various hot water needs.
- It is an easy installation product, which allows you to have hot water ready for use: ideal for treating yourself to a nice one relaxing and regenerating hot shower!



* the indicated power is the one suggested by the manufacturer for the best combination of performance / energy saving, other powers are also available on customer request

TECHNICAL DATA

	SSO 50	SSO 80	SSO 100	SSO 120	SSO 150	SSO 200
Thermal Dispersiom 50° (KWh/24h)	1,11	1,61	1,66	2,02	2,29	2,55
Power (W)	1500	1500	1500	1500	2000	2000
Voltage (V)	230	230	230	230	230	230
Heating time (Δt 50°)	145'	232'	245'	280'	310'	372'
Max working temperature (C°)	65°	65°	65°	65°	65°	65°
Max working pressure (bar)	8	8	8	8	8	8
Protection against humidity	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Insulation class	I	I	I	I	I	I
Profile	M	M	M	L	XL	XL
Energy Class	C	C	C	C	C	C

ELECTRIC WATER HEATERS HORIZONTAL STANDARD SERIES

+ **INCREASED MAGNESIUM ANODE,**
FOR TOTAL PROTECTION AGAINST
VACANT CURRENTS

+ **GLASS ENAMELED**
TANK

+ **ABSENCE OF CFC;**
POLYURETHANE FOAM
FOR ECOLOGICAL THERMAL
INSULATION

+ **HUMIDITY PROTECTION CLASS**
IPX4



**COPPER
HEATING ELEMENT**



**SMOKE
CONTROL**



**ENVIRONMENT
RESPECT**



**MAGNESIUM
ANODE**



**LED
CONTROL**




**ROHS
COMPONENT**



**POLYURETHANE
FOAM CFC FREE**




THERMOSTAT



**ERP
2017**

DIMENSIONS

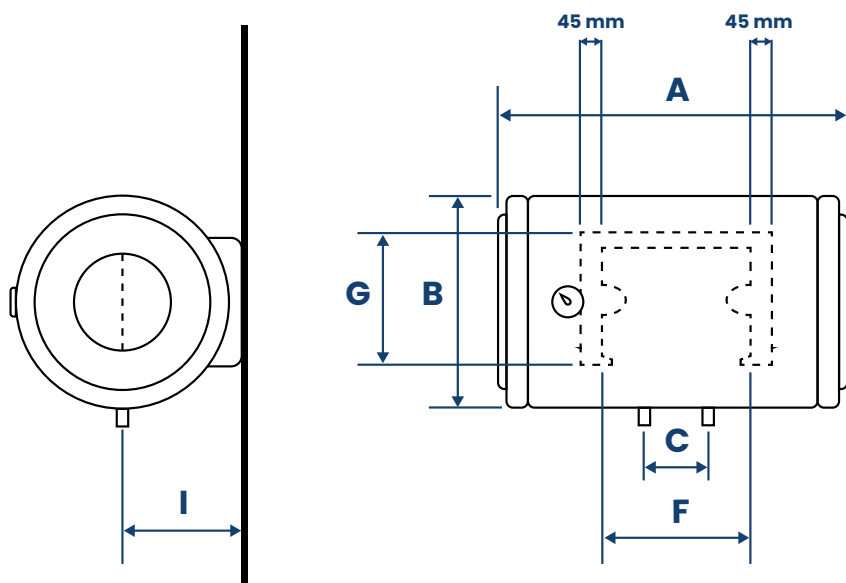

	A	B	C	F	G	I
SSO 50	510 mm	460 mm	100 mm	125 mm	350 mm	240 mm
SSO 80	700 mm	460 mm	100 mm	330 mm	350 mm	240 mm
SSO 100	805 mm	460 mm	100 mm	435 mm	350 mm	240 mm
SSO 120	1000 mm	460 mm	100 mm	510 mm	350 mm	240 mm
SSO 150	935 mm	550 mm	140 mm	450 mm	350 mm	285 mm
SSO 200	1105 mm	550 mm	140 mm	640 mm	350 mm	285 mm



Via G. Galilei, 16/18, Castelnovo di Sotto (RE), 42024, Italy
+39.0522.1750007 • www.sistema.it • fb@gcexport.it